

P2A

Highly sensitive Hall Effect sensor

Advanced Hall Sensors Ltd (AHS) specialises in the design and manufacture of semiconductor sensors using the technique of Molecular Beam Epitaxy (MBE), which provides excellent uniformity and reproducibility. P2A Hall Sensor is outstanding for its High sensitivity and its low temperature coefficients. The P2A Hall Sensor is fabricated from AlGaAs/InGaAs/GaAs-2DEG (Two-dimensional electron gas) heterojunction semiconductors. Due to its wide band-gap material and high mobility, this sensor provides numerous advantages over existing Silicon technology.

Features and benefits

- High Sensitivity (160V/AT)
- Low current requirement
- Very low power consumption
- Extended operating temperature range
- Small linearity error of the Hall voltage
- Plastic miniature package for through slot and SOT-143 surface mounting

Potential applications

- Magnetic field measurement
- Low temperature applications
- Current and power measurements
- Control of brushless DC motors
- Micro switches
- Position sensing
- Speed and RPM sensing

Table 1. Absolute maximum ratings

Parameter	Symbol	Rating	Unit
Control Voltage	V_C	6	V
Control Current	I_C	9	mA
Power Dissipation	P_D	54	mW
Operating Temperature	T_{OP}	-100 to +200	°C
Storage temperature	T_S	-100 to +200	°C
Soldering temperature	T_{SOL}	260	°C

Table 2. Electrical characteristics

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Hall Voltage	V_H	$I_C=1mA, B=100mT$	14	16	18	mV
Residual Ratio ^{*1}	V_{HO}/V_H	$I_C=1mA$	-5		+5	%
Residual Ratio	V_{HO}/V_H	$I_C=5mA$	-7		+7	%
Input Resistance	R_{IN}	$I_C=1mA, B=0mT$	620	720	780	Ω
Output Resistance	R_{OUT}	$I_C=1mA, B=0mT$	650	720	820	Ω
Temperature coefficient of Hall Voltage ^{*2}	α	$I_C=1mA, B=100mT$ ($T_1=-100^\circ C, T_2=150^\circ C$)	-0.05	-0.06	-0.08	%/°C
Temperature coefficient of Input Resistance ^{*3}	β	$I_C=1mA, B=0mT$ ($T_1=-100^\circ C, T_2=150^\circ C$)	-----	0.3	0.4	%/°C
Linearity of Hall Voltage ^{*4}	γ	$I_C=1mA, B_1=60mT,$ $B_2=500mT$	-----	0.5	1.0	%

Notes:

1. $Residual_Ratio = \frac{V_{HO}(B=0mT)}{V_H(B=100mT)}$	2. $\alpha = \frac{1}{V_H(T_1)} \times \frac{V_H(T_2) - V_H(T_1)}{T_2 - T_1} \times 100$
3. $\beta = \frac{1}{R_{IN}(T_1)} \times \frac{R_{IN}(T_2) - R_{IN}(T_1)}{T_2 - T_1} \times 100$	4. $\gamma = \frac{K_H(B_2) - K_H(B_1)}{\frac{1}{2}[K_H(B_1) + K_H(B_2)]} \times 100$
V_{HO} : Offset voltage	
B : Magnetic flux density	
T_1, T_2 : Ambient Temperature	
K_H : Current sensitivity	$K_H = \frac{V_H}{IB}$

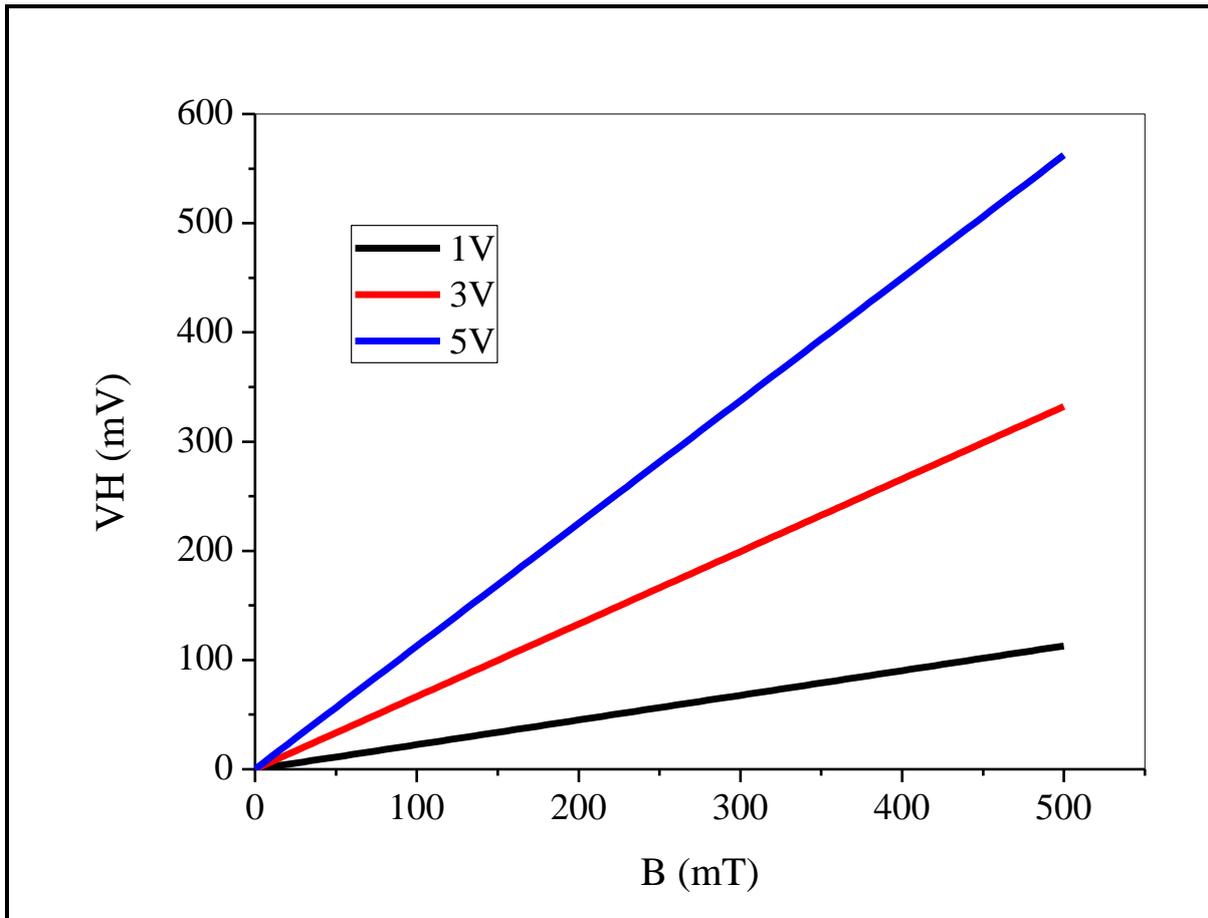


Figure 1. Output Hall Voltage versus Magnetic field at inputs of 1V, 3V and 5V across the Hall sensor.

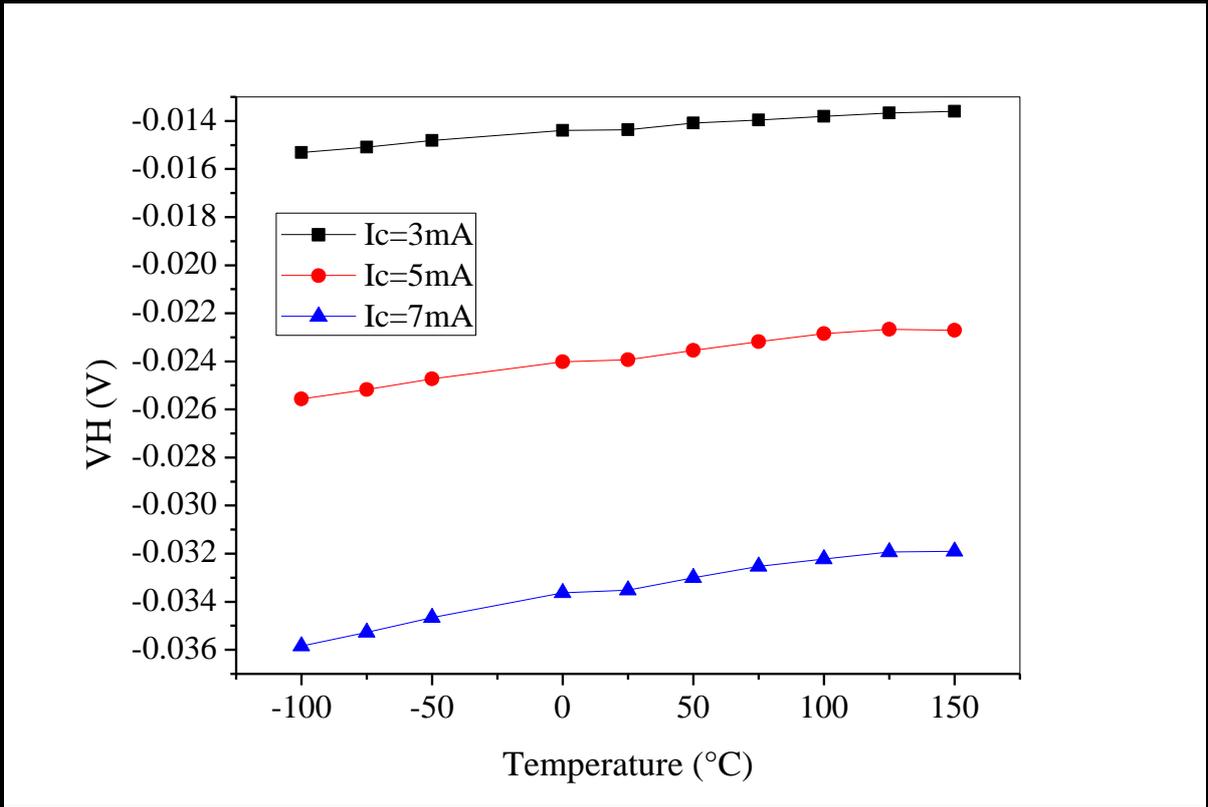


Figure 2. Output Hall Voltage versus Temperature at input bias currents of 3mA, 5mA and 7mA across the Hall sensor and at 30mT magnetic field.

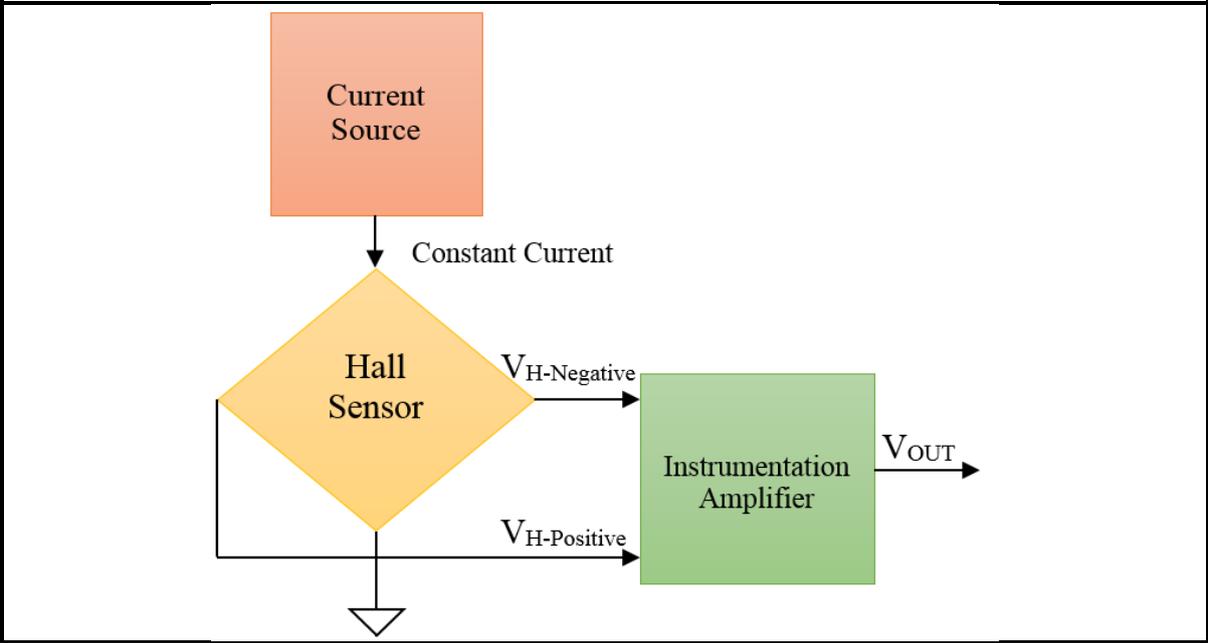


Figure 3. Recommended circuit.

<お問い合わせは> 株式会社 セスナ
 東京都港区赤坂4-1-1
 SHIMA赤坂ビル (〒107-0052)
 TEL 03-6234-4347
 sales@sesna.net
 https://sesna.net/

Contact us:
Email: sales@ahsltd.com
Phone: +44 161 873 7334

Address: Advanced Hall Sensors Ltd, Unit C3, Broadoak Business Park, Ashburton Road
 West Trafford Park Manchester, M17 1RW

Outline drawings (unit: mm)

